

Dash-iN XS

STANDARD

HIGH TEMPERATURE



Functional Specifications

RF air protocol	EPC Class 1 Gen 2; ISO18000-6C
Operating frequency	UHF 902-928 MHz (US); 866-868 MHz (EU)
IC type	Alien Higgs-3
Memory configuration	96-bit EPC; 512-bit user memory; 64-bit TID
Functionality	Read / write (user programmed)
Memory – expected read / write cycles	100,000 cycles at 77°F (25°C)
Data retention	Up to 50 years ¹
Read rate	400 tags per second for 96-EPC bit number
Warranty (limited)	1 year

Performance Characteristics

Read range in metal (2W ERP) ²	Up to 5 ft (1.5 m)
Polarization	Linear

Physical Specifications

Material	Ceramic
Mounting system	Epoxy, embedded
Color	White

Environmental and Industry Compliance

RoHS	EU Directive 2002/95/EC
CE	Yes
ATEX	ATEX Compliant



¹ The chip data retention is based on chip operating under general environment conditions.

² Actual read range may vary based upon use case and antenna power.

Operational and Environmental Specifications

Shock (drop)	3 ft (1 m) to concrete/granite up to 200 cycles
Vibration	MIL-STD-810F
Compression strength	Packaging dependent
IP classification	IP 68
Humidity	
Operational humidity	5%-95% non-condensing
Storage humidity	5%-95% non-condensing
Operational temperature	
Cold	-22°F (-30°C)
Dry heat	+185°F (+85°C)
Thermal shock	-22°F to 185°F (-30°C to +85°C); cycled


STANDARD VERSION

Application temperature	
Cold	-40°F (-40°C)
Dry heat	+302°F (+150°C)

HIGH TEMPERATURE VERSION


Application temperature	
Cold	-40°F (-40°C)
Dry heat	+455°F (+235°C)
Peak temperature	+482°F/+250°C 6 hours duration
Temperature cycling test	30 Minutes at + 482°F/+ 250°C, 1 hour cool-down; 500 test cycles

Product Dimensions and Weight

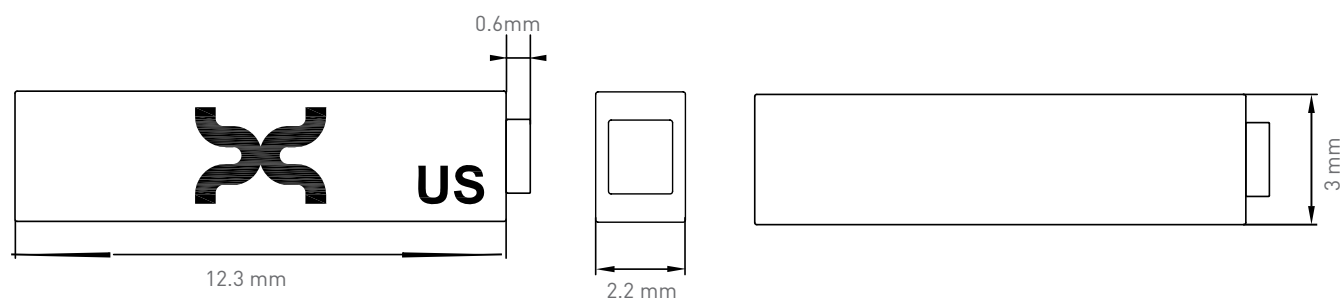

Dimensions (mm)	12.3 x 3 x 2.2
tolerance	+/- 0.3
Dimensions (in)	0.48 x 0.12 x 0.09
tolerance	+/- 0.012
Weight	0.016 oz (0.44 g)

Radiation Pattern

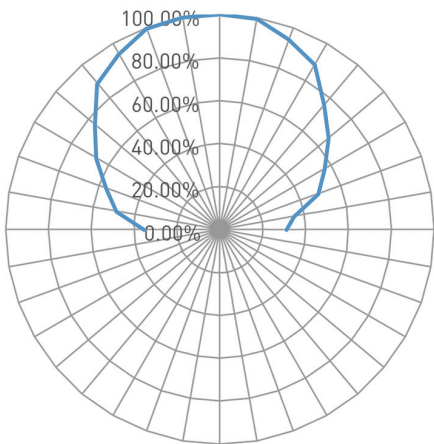

Order information

X4201-US000-H3	Dash iN US Standard Version
X4201-EU000-H3	Dash iN EU Standard Version
X4201-US050-H3	Dash-iN US High Temperature Version
X4201-EU050-H3	Dash-iN US High Temperature Version