




# > aWR 470

Particularly adapted to all kinds of paper substrates  
 Very good sensitivity  
 Excellent blackness


**AWR® 470 SolFree® is the only ribbon in the world to be coated without using solvents, including for the backcoating.** SolFree® represents a saving of 365g of CO<sub>2</sub> compared to the same ribbon (with average dimensions) produced with a traditional process for the backcoating. AWR® 470 SolFree® is well known for its high coverage ability which is essential for printing the rough materials widely used in logistics.

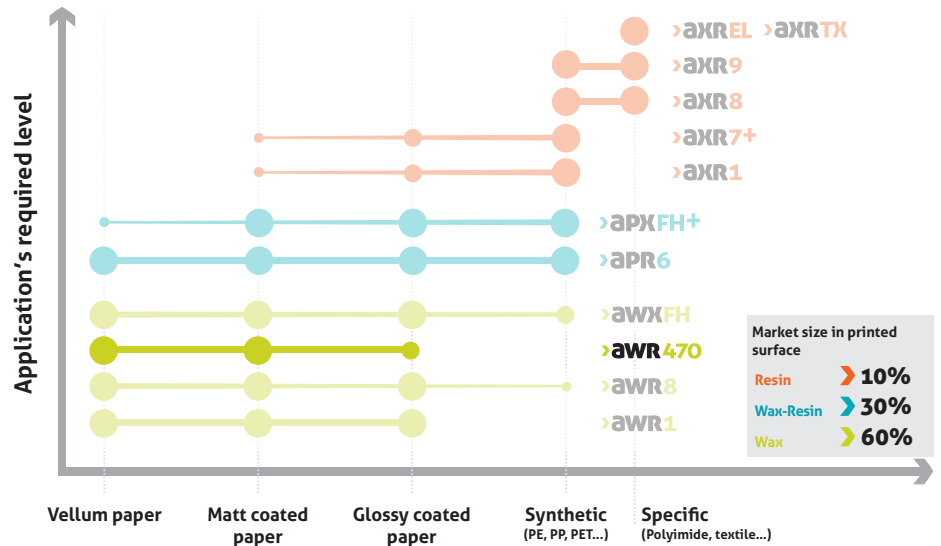


## Printing receptor

papers	
Vellum	● ● ●
Coated	● ● ●
Glossy coated	● ● ○

## Printer settings

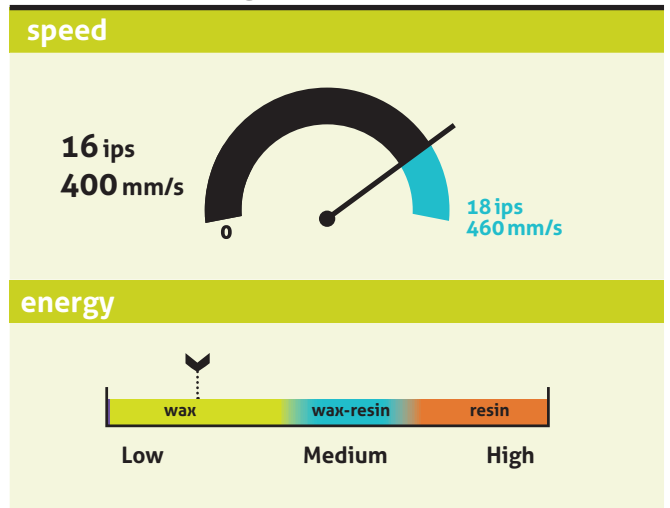

## Print resistance

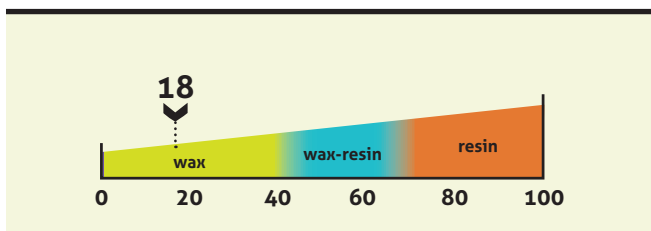

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

## Your ribbon identity

Colours: ● ● ● ● ●


Length (m): .....

Width (mm): .....

Part number: .....

Your distributor: .....


Contact : .....





# > aWR 470

## Application fields

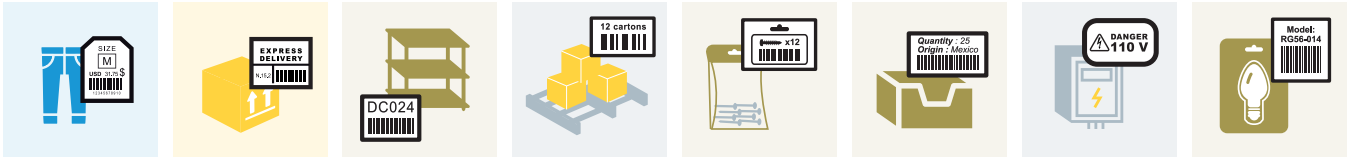


## Product performance

print quality					
90°Barcode	50	A <sub>a</sub> Small characters	80	Logos	95
0°Barcode	100	2D Barcode	88	Blackness	2,2 ODR*
technical resistances					
Heat	60°C / 140°F	Light/Blue Wool	>7	Solvents	100
Water/Submerge	100	Rubbing	10		

## Product physico-chemical features

product structure	
<b>PET film</b>	Thickness: 4,5 µm
<b>Ink</b>	Wax
Melting point	65°C/149°F
<b>Backcoating</b>	Patented Solfree®
Coefficient of Friction	Kd < 0.2
<b>Ribbon thickness</b>	< 9 µm
The ribbon is anti static build-up treated	

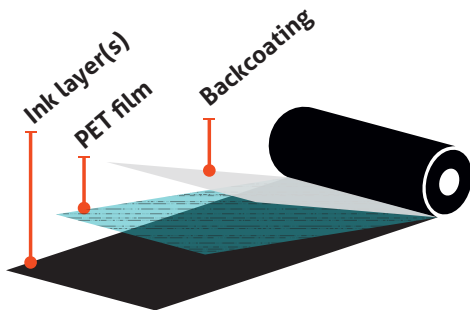

## Storage

### storage conditions

12 months recommended  
20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.