




# > aWR8

Receptor multi-compatibility  
Excellent blackness  
Competitiveness

**AWR®8 is the standard ribbon from the inkanto wax range.**


It doesn't make any compromise to quality and printing performance and therefore matches all criteria expected by a traditional wax application.

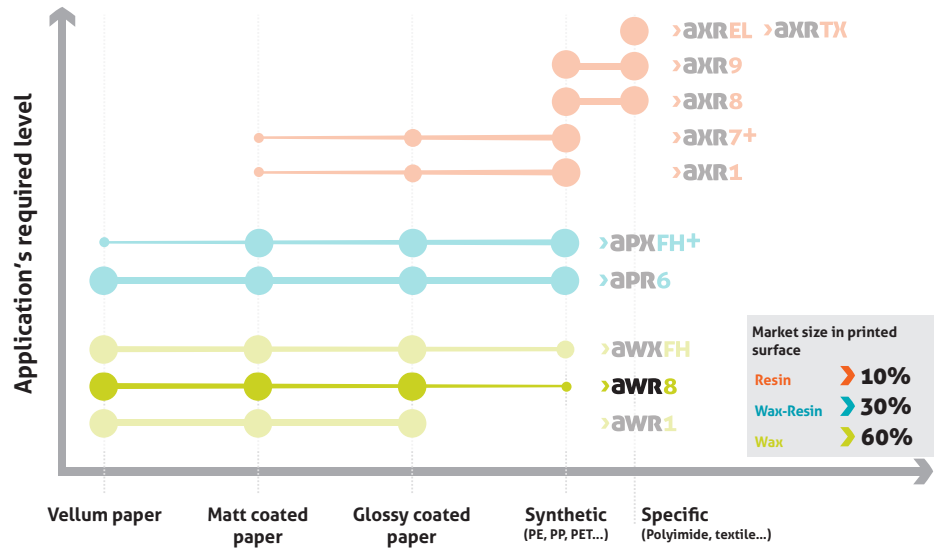


## Printing receptor

papers		synthetics	
Vellum	●●●	PP	●○○
Coated	●●●	PE	●○○
Glossy coated	●●●	PET	●○○

## Printer settings

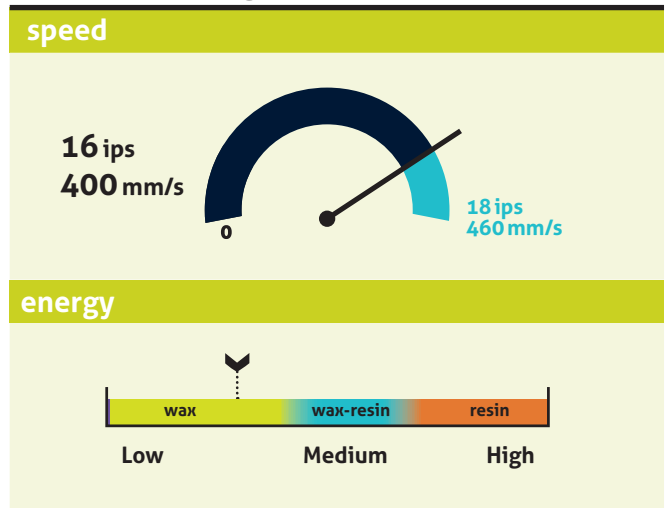

## Print resistance

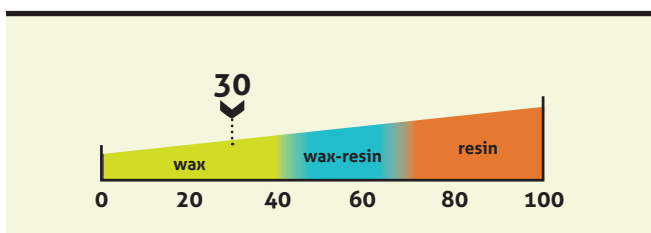

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

## Your ribbon identity

Colours: ● ● ● ● ●


Length (m): .....

Width (mm): .....

Part number: .....

Your distributor: .....

Contact: .....





# > aWR8

## Application fields




## Product performance

print quality		
90°Barcode                      70/100	A <sub>a</sub> Small characters                      85/100	Logos                      95/100
0°Barcode                      100/100	2D Barcode                      100/100	Blackness <small>*Optical Density by Reflection, measured using a densitometer.</small> 2,1 ODR* / 2,5
technical resistances		
Heat                      60°C / 140°F to 300°C / 572°F	Light/Blue Wool                      >7/100	Solvents                      100/100
Water/Submerge                      100/100	Rubbing                      40/100	

## Product physico-chemical features

product structure	
<b>PET film</b>	Thickness: 4,5 µm
<b>Ink</b>	Wax
Melting point	65°C/149°F
<b>Backcoating</b>	Silicon based
Coefficient of Friction	Kd < 0.2
<b>Ribbon thickness</b>	< 9 µm
The ribbon is anti static build-up treated	

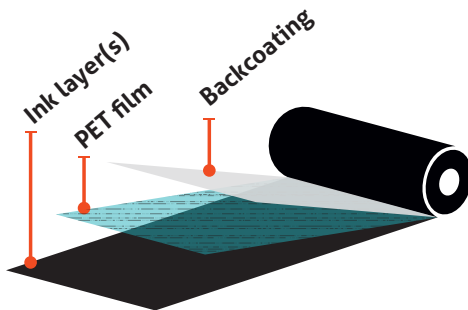

## Storage

### storage conditions

12 months recommended  
 20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.