



APR600

Application fields




Product performance

print quality					
90°Barcode	80	A _a Small characters	90	Logos	95
0°Barcode	100	2D Barcode	90	Blackness	2,2 ODR*
technical resistances					
Heat	100°C 212°F	Light/Blue Wool	>7	Solvents	100
Water/Submerge	100	Rubbing	70		

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Wax-Resin
Melting point	80°C/176°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 8 µm
The ribbon is anti static build-up treated	

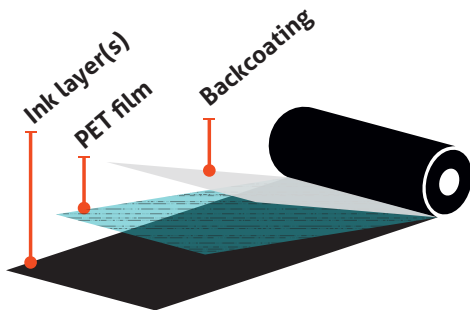

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.