

Dash XXS-Autoclavable Version



Functional Specifications

RF air protocol	EPC Global Class1Gen 2; ISO18000-6C
Operational frequency	UHF 902-928 MHz (US); 866-868 MHz (EU)
IC type	Alien Higgs-3
Memory configuration	96-EPC bits; 512-bit user memory
Functionality	Read / write (user programmed)
Memory – expected read / write cycles	100,000 cycles at 77°F (25°C)
Data retention	Up to 50 years ¹
Read rate	400 tags per second for 96-EPC bit
Warranty (limited)	1 year
Material	Ceramic ³
Weight	0.004 oz (0.12 g)

Performance Characteristics

Read range on metal (2W ERP) ²	Up to 3 ft (0.9 m)
Polarization	Linear

¹ The chip data retention is based on chip operating under general environment conditions.

² Actual read range may vary based upon use case and attachment methods.

³ To prevent adverse reaction with glue during autoclave, delivered tags that use a glue attachment method on the instruments will not be coated with an external layer of paint. To ensure the best results for the solution, it is advisable to use the glue provided by Xerafy.

Environmental and Industry Compliance

FDA class	Class I
Compression strength	Packaging dependent
IP classification	IP68
Standard compliancy	RoHS (EU Directive 2011/65/EU) , CE (EU version)
Operational temperature (MIL STD 810-F)	-40°F to +185°F (-40°C to +85°C)
Application temperature (MIL STD 810-F)	-40°F to +302°F (-40°C to +150°C)
Humidity	
Operational humidity	5%-95% non-condensing
Storage humidity	5%-95% non-condensing


Cleaning and Disinfection Process (ANSI/AAMI ST79)

Chemical sterilization for decontamination	
Liquid chemical sterilants include glutaraldehyde, hydrogen peroxide, hydrogen peroxide-peracetic acid combinations, sodium hypochlorite, and peracetic acid.	Pass
Thermal (hot water) disinfection	
- Washer-sanitizers, washer-decontaminators, utensil washers, and cart washers reduce microbial contamination by means of cleaning agents, hot water, rinsing, and drying. - Pasteurization equipment provides cleaning and high-level disinfection at water temperatures of 65°C to 77°C (150°F to 170°F) for a contact time of at least 30 minutes. - Washer-disinfectors provide a cycle of cleaning, rinsing, disinfection, and drying at temperatures that are usually higher than those of washer-sanitizers	Pass
Thermal sterilization for decontamination	
Saturated steam can be used to decontaminate devices capable of withstanding high temperatures (121°C to 135°C [250°F to 275°F]) and pressures (16 to 35 psig). Washer-sterilizers provide cleaning and rinsing followed by exposure to saturated steam at temperatures of 121°C to 135°C (250°F to 275°F).	Pass
Ultrasonic cleaner	Pass
3KHz for 30 min	
Disinfection by light	Pass
C wave ultraviolet and wavelength range is from 200nm to 275nm	
Detergent enzyme cleaner	Pass
Autoclave sterilization	Pass
134 °C and 0.6 Mpa for more than 1000 cycles	

Application and Installation


Application	Surgical instruments
Applicable surface	Metal
Mounting methods	Glue, embedded

Product Dimensions

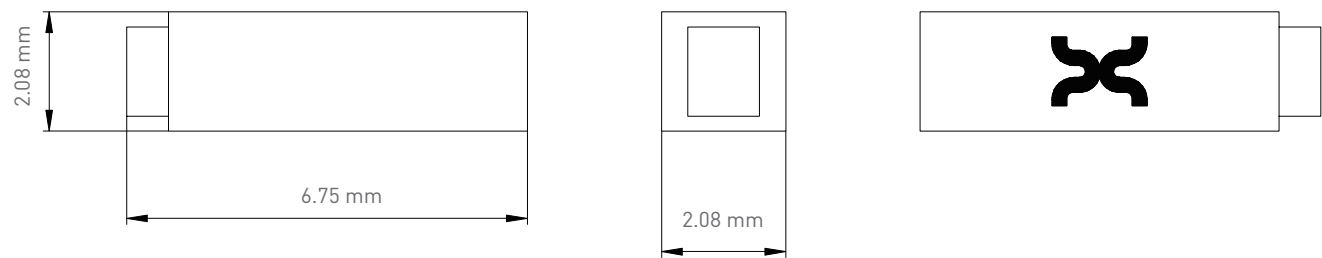

Dimensions (mm)	6.75 x 2.08 x 2.08
tolerance	+/- 0.2
Dimensions (in)	0.26 x 0.08 x 0.08
tolerance	+/- 0.008

Radiation Pattern and Polarization

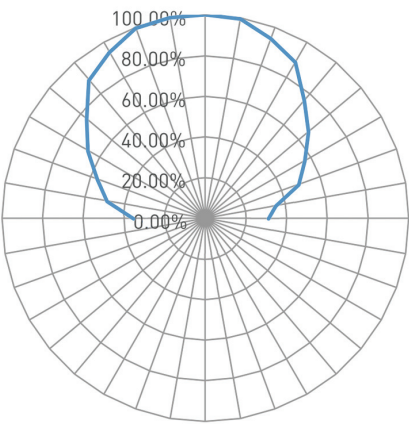

Order information

X4301-US000-H3	Autoclavable Dash XXS US (Painted)
X4301-EU000-H3	Autoclavable Dash XXS EU (Painted)
X4301-US040-H3	Autoclavable Dash XXS US (Unpainted)
X4301-EU040-H3	Autoclavable Dash XXS EU (Unpainted)