

**FOR FLAT HEAD** 

APR® 6 is a highly sensitive premium wax/resin ribbon designed to give excellent printing performance at low energy. It can be printed on a wide range of substrates with the same level of performance.

The ink provides excellent printing quality for all types of barcodes, very small text, large characters and logos, at a blackness up to 2.1 (ODR).

The ribbon structure allows printing on a wide range of receptors, such as uncoated and coated papers and synthetics.

The printed image offers a good level of smudge resistance combined with heat resistance up to 100°C.

Those characteristics remain at speeds up to 300 mm/s (12 ips), and with 200, 300 and 600 DPI printheads, making this ribbon perfectly adapted to the labelling market.


APR® 6 grade features ARMOR's outstanding backcoat technology, ensuring excellent printhead protection, preventing clogging and static build-up.


Low

Medium


- VERY GOOD PRINTING QUALITY
- **▶ HIGH SPEED PRINTING CAPABILITY**
- ► EXCELLENT RECEPTOR MULTI-COMPATIBILITY

  AND SENSITIVITY

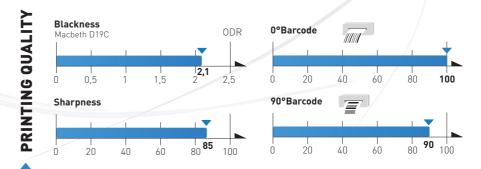

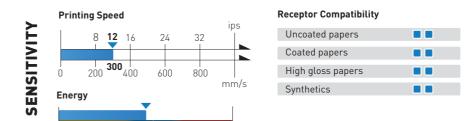

High

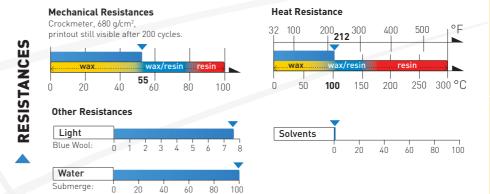

Evaluation of observed performances of the ribbon with optimised printer settings and receptors (ARMOR procedure).





PREMIUM - WAX/RESIN **FOR FLAT HEAD** 

## **COLOUR RANGE**

Data exposed in this sheet are for the black ribbon. Printing performance of the colour ribbons are close to black ones.







(286 C)







(554 C)





Dark Red

(485 C)



Blue (Reflex Blue C)

Light Red (1788 C)





Brown (463 C)

# **EXAMPLES OF APPLICATION FIELDS**

The characteristics of APR® 6 answer the requirements of the following application fields: (If your application is not among the ones below, please contact us.)



Signage & Logos

Livestock



















Conveyor sorting







Chemical drums

Automotive

### **CERTIFICATIONS AND APPROVALS**

Food contact: This ribbon is compliant with the European Directive 1935/2004/EC.

UL Approved: Legibility and durability of the printed label.

Heavy metals: The ribbon is compliant with EC 95/638. SGS reports available upon request.

RoHs/WEEE: EC directives 2002/95 and 2002/96, compliance to the limitation of dangerous substances in electric and electronic equipments.

REACH: As a European manufacturer, ARMOR is completely fulfilling REACH requirements. Our ribbons are free from the Substances of Very High Concern (SVHC).


CP65: The ribbon is free from the substances listed.

Halogen: this ribbon is halogen free.

Contact us for all other regulations linked to product compliance with toxicity, treatment of wastes, banned components, packaging, etc.

#### **RIBBON SPECIFICATIONS**

Outdoor applications



#### Backcoating:

Silicon based. Friction coefficient: Kd < 0.2.

### PET film:

Thickness: 4.5 µm. Tearing resistance: > 300 N/mm<sup>2</sup>(MD).


# Ink:

Wax/Resin. Melting point: 75°C (ARMOR procedure).

#### Ribbon:

Thickness (black): < 9 µm. The ribbon is anti static build-up treated. Storage: 12 months, 5-35°C (40-95°F), 20-80 % Humidity Rate.

## SUSTAINABLE DEVELOPMENT



The film is produced in one of the industry's most organised and awarded factories:

#### DECAPLAN:

Sustainable development action plan based on 10 leading topics involving all profiles of the company.



#### Global Compact:

UNO initiative inviting companies to apply fundamental ethical and environmental values.



## Responsible Care:

International Council of Chemical Associations' charter towards constant improvements in health, safety and environment.



#### Quality, health, safety and environment certifications:

ISO 9001 : 2008, N°QUAL/2007/28312 ISO 14001 : 2004, N°ENV/2007/28315 OHSAS 18001: 2007, N°SMS/2007/28316



# AFAQ 1000NR (means millennium):

Evaluation of companies' state of advancement in sustainable development. ARMOR, 1st company to reach "Exemplary" level





