



Symbol M2000 Cyclone

Hands-free bar code scanner



FEATURES

Reads 1-D, 2-D, and Composite UCC/EAN and RSS bar code symbologies

Capture more data and "future-proof" your investment

Cyclone uses the latest, brightest visible laser diode technology

Scanner is easy to aim, even in brightest sunlight

Scan pattern switches and mode indicator LEDs are top-mounted for easy viewing

Switching scan patterns is easy and convenient for operations with a mix of applications, bar codes and merchandise

The Symbol Cyclone from Motorola captures more data to enhance your applications

A smart investment, the innovative Symbol Cyclone scanner is future-ready now, providing the ability to decode existing, new and emerging bar code symbologies instantly. The Cyclone scanner is packed with features that deliver optimum flexibility including next generation scanning technology. As good looking as it is practical, the Cyclone's sleek design complements any store's decor. Large merchandise or small, single or multiple bar code types, this scanner can handle it all. Revolutionary user-selectable scan pattern versatility plus remarkable ease of use and adaptability make the Adaptive "Cyclone" Scanner Series a standout for bar code scanning at point of sale.

Reads current and new UCC/EAN symbologies with ease

New ways of doing business require new types of bar codes to keep products flowing smoothly from producer to user. The Cyclone scanner was designed to handle new and emerging UCC/EAN-driven symbologies:

The UCC/EAN Reduced Space Symbology (RSS) is a "stacked" linear bar code for items previously too small to be marked. Track previously untrackable data on products so that lot numbers, expiration dates, weights, prices and currency information are included in the bar code.

- Retail General Merchandise: Label items with complete product identification for better management of inventory and profitability.
- Convenience Stores and Food Stores: Encode random quantity and weight products, such as meat, produce and cheeses, with product identification information for better inventory management and to simplify the order and fulfillment process.

The UCC/EAN Composite Symbology (CS) combines the standard linear UPC/EAN/JAN code, a proven tool for POS checkout, receiving and inventory tracking, with a two-dimensional (2-D) PDF417 portable data file that incorporates extended product information.

SPECIFICATION SHEET

SYMBOL M2000 CYCLONE
Hands-free bar code scanner

Handheld or hands-free operation

Operators can scan heavy and bulky items without lifting them onto the checkstand; scan smaller items without lifting the scanner.

Built-in, adjustable stand

Operators adjust the Cyclone to their preference to optimize efficiency for maximum throughput

- Healthcare: Hospitals, drug stores and pharmacies can trace manufacturing lot numbers on pharmaceuticals and other controlled substances. Caregivers can streamline prescription processing and verify patient ID by scanning patient identification cards.
- Logistics: Gain access to shipping as well as content information at any point in the supply chain.
- Retail Food: Shopkeepers can record purchase data and identification cards with a single scan of the composite code. The identification and shipping data is securely attached to the product - stored on a bar code no bigger than a postage stamp.
- National Identification Cards: Many countries use national ID cards to open credit and telephone accounts and for identification at border crossings.
- Customer Loyalty Cards: Track customers' shopping habits.

Choose the Best Scan Pattern for Your Application

At the point of sale, the Cyclone scanner captures bar code data instantly, shortening checkout lines with "point-and-scan" performance on 1-D, 2-D, RSS and CS symbologies.

Cyclone Omni-Directional Scan Pattern: A rotating omni-directional scan pattern reads even truncated bar codes by eliminating scan pattern "holes."

Raster Scan Pattern: The Cyclone's scan pattern automatically covers 2-D and CS symbols for the best scanning performance on damaged and poorly printed bar codes, while eliminating the need for operator training.

Semi Omni Scan Pattern: The "Semi Omni" scan pattern is a combination of the omni-directional and raster scan patterns. This unique pattern has superb decoding performance on extremely truncated bar codes that you find on small items in convenience, drug and specialty stores.

High Density Single Line Scan Pattern: The Cyclone's single scan line appears as a "mini" raster and scans multiple areas of 1-D codes to swiftly and accurately capture data on poorly printed and damaged bar codes. The single line is ideal for reading bar coded menus and pick lists.

Bright LEDs indicate which scan pattern is working. For intuitive aiming accuracy, even in the brightest lighting conditions and for can't miss, single-pass scanning, the laser diode emits a highly visible beam for easy-to-see scan patterns. When you lift the scanner off the counter, it automatically switches from hands-free to handheld mode. The Cyclone immediately adjusts the scan pattern for optimum



UCC/EAN Composite Symbology combines 1-D and 2-D scanning capabilities.

handheld data capture. Put the scanner back on the counter and it automatically returns to hands-free mode. If countertop space is at a premium, just place the Cyclone in the optional wall-mount stand.

Premium Features and Unique Ergonomics Adapt to Many Uses

The Cyclone's adjustable, built-in stand accommodates scanning a wide range of item sizes for efficient throughput. The ergonomically shaped handle fits snugly in the hand to ensure a secure grip. The large, contoured scan trigger is handle-mounted for easy point-and-shoot operation. The patented two-finger trigger operates with minimum effort and delivers superior sensory feedback.

There's no need to change the scanner's orientation when changing the scan pattern. All of the scan patterns exit the Cyclone from the large, scratch-resistant and deeply recessed window at the front of the scanner. The broad, rounded stand supplies rock-solid support for checkstand or countertop use. For maximum non-slip security, rubber feet cushion the bottom of the scanner.

Ingenious Design Provides Superior Throughput

Motorola's attention to detail comes through in design elements such as the twin beepers built into the sides of the Cyclone scanner handle. The scanner beeper is loud enough to be heard by operators working in noisy environments.

Cyclone scanners offer a host of high-performance features for unmatched adaptability at the point of sale. The Cyclone provides direct connections to IBM, USB, RS-232 and our Synapse "smart" cabling that provides connectivity to all popular host terminals. Synapse Smart Cables eliminate the need for separate scanner-to-host controllers. Electronic Article Surveillance deactivation is also an option; locating the deactivation antenna within the scanner saves precious space at the point of sale and eliminates secondary operations.

Advanced Data Formatting, another Motorola breakthrough, enhances Cyclone data capture productivity. No need to modify host-system software to match data input formats. Instead, simply program the Cyclone. The scanner translates the bar code string and, for later tracking, stamps the bar code prefix with time, date and the number of the employee who scanned the data.

Like every scanner from Motorola, the Cyclone is an unbeatable value because it is backed by our global network of service and support from the world leader in bar code-driven data management systems, with millions of scanners and terminals installed.

For more information about the Symbol M2000 Cyclone Series, contact us at +1.800.722.6234 or +1.631.738.2400, or visit us on the Web at: www.symbol.com/m2000



The adjustable built-in stand pivots to make scanning items easy – no matter how large or small.



PDF417 bar codes are ideal for age verification applications

SPECIFICATION SHEET

SYMBOL M2000 CYCLONE
Hands-free bar code scanner

M2000 Specifications

Physical Characteristics

Dimensions:	7.8 in. L x 3.4 in. W x 5.4 in. D 198 mm L x 86 mm W x 137 mm D
Weight:	12 oz. / 340 gm
Mounting Options:	Wall-mount stand
Durability:	Withstands multiple 4 ft./1.2 m drops to concrete

Performance Characteristics

Light Source:	630–650-nm laser diode
Scan Pattern:	Single line, 2-D Raster, omni-directional, semi-omni-directional
Frame Rate:	Omni-directional: 640 x 22 frames/sec. Raster: 590 x 22 frames/sec. Single Line: 590 x 22 frames/sec.
Optical Resolution:	<i>Raster/Single Line:</i> Can decode a 6.6 mil (minimum X-dimension) symbol (PDF417) <i>Y-dimension must be 3x Omni-directional:</i> Can decode a 5.5 mil (minimum X-dimension) symbol
Codes Supported:	<i>1-D Symbolology:</i> UPC/EAN/JAN, NW7, Code 128, Code 39 Full ASCII, MSI/Plessey, Interleaved 2 of 5, Discrete 2 of 5, UCC/EAN, 128, Codabar <i>2-D Symbolology:</i> PDF417; Composite Codes; UCC/EAN, RSS Code <i>Ask about other codes that are supported</i>
Print Contrast:	25% minimum reflectance (1-D) 35% minimum reflectance (PDF)
Interfaces Supported:	IBM 468X, 469X; Universal Serial Bus (USB), RS-232C, Wand Emulation, OCR, OCIA, Fujitsu, ICL, NCR, Nixdorf, Omron, TEC, Sharp, Casio POS and Computer

Interfaces Supported Keyboard Wedges from IBM, DEC Telex, (continued): NCR, WYSE, HP and other manufacturers

User Environment

Ambient Light: Immune to normal artificial indoor and natural outdoor (direct sunlight) lighting conditions.

Fluorescent: 450 ft.-candles

Incandescent: 450 ft.-candles

Mercury Vapor: 450 ft.-candles

Sodium Vapor: 450 ft.-candles

Sunlight: 8,000 ft.-candles

Operating Temp.: 32° to 104°F (0° to 40° C)

Storage Temp.: -40° to 140°F (-40° to 60° C)

Humidity: 5% to 95 (noncondensing)

Power: 5.2 VDC ± 10% @ 400 mA nominal (1.6 watts nominal)

Product Safety: *United States:* UL1950, 1995
Worldwide: EN 60950: 1992 +A1, +A2, +A3 IEC 950/European Union Req.
Canada: CAN/CSA C22.2#950-95

EAS Support: Checkpoint Electronic Article Surveillance

Regulatory

Electrical Safety: Certified to UL 1950, CSA C22.2 No. 950 EN60950/IEC950


EMI/RFI: FCC Part 15 Class B, ICES-003 Class B, European Union EMC Directive, Australian SMA

Laser Safety: CDRH Class II, IEC Class 2


EN410 CE



Cyclone Omnizone

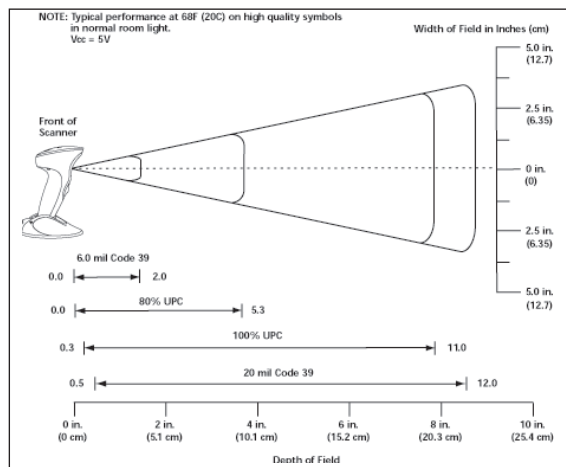

Cyclone Rasterzone

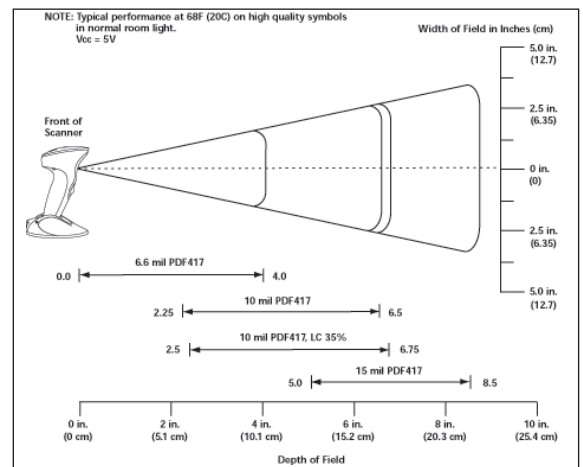

MOTOROLA

motorola.com

Part number SS-M2000. Printed in USA 08/07. MOTOROLA and the Stylized M Logo and Symbol and the Symbol Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. ©2007 Motorola, Inc. All rights reserved. For system, product or services availability and specific information within your country, please contact your local Motorola office or Business Partner. Specifications are subject to change without notice.