




EOS-220

APPLICATIONS

Apparel



GENERAL SPECIFICATIONS

Frequency FCC 902-928 MHz / ETSI 865-868 MHz / ASIA 950-956 MHz**Protocol** EPC Class 1 Gen 2**EPC memory** Up to 128 bits**User memory** Up to 64 bits**Antenna size** 45 x 25 mm / 1.77 x 0.98 in**Label size** 48 x 28 mm / 1.89 x 1.10 in


AVAILABLE FORMATS



Adhesive label

MECHANICAL DIMENSIONS

DIMENSIONS	DESCRIPTION	METRIC	US
A x B	Antenna size	45 x 25 mm	1.77 x 0.98 in
C x D	Label size	48 x 28 mm	1.89 x 1.10 in
E	Web width	54 mm	2.12 in
F	Pitch	32,6 mm ± 0,5 mm	1.28 in
G	Die-cut to web edge	3 mm	0.12 in
H	Bad mark	Ø 4 mm	Ø 0.16 in

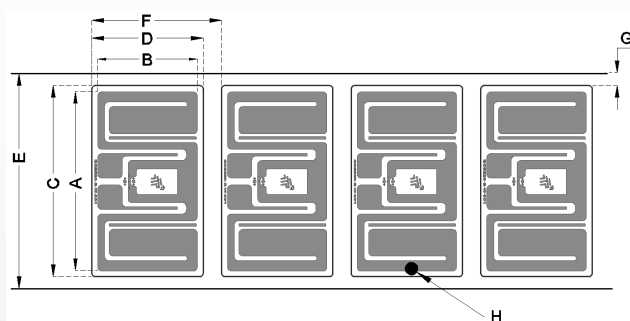

FEED DIRECTION →



T A G E O S

PRODUCT DATASHEET EOS-220


RFID CHIP SILICON

TAG SILICON	IMPINJ MONZA R6	IMPINJ MONZA R6-P
Protocol	EPC Class 1 Gen 2	EPC Class 1 Gen 2
Operating frequency	860 – 960 MHz	860 – 960 MHz
EPC memory	96 bits	Up to 128 bits
User memory	-	Up to 64 bits
Operating temperature	-40°C / +85°C (-40°F / +185°F)	-40°C / +85°C (-40°F / +185°F)

PRODUCT CHARACTERISTICS


	ADHESIVE LABEL
Antenna material	Aluminum
Front face material	White TT printable paper White TT printable plastic
Back face material	-
Adhesive	Solvent-free permanent acrylic adhesive
Final inspection	100% tested, defective tags marked

TAG READ PERFORMANCE

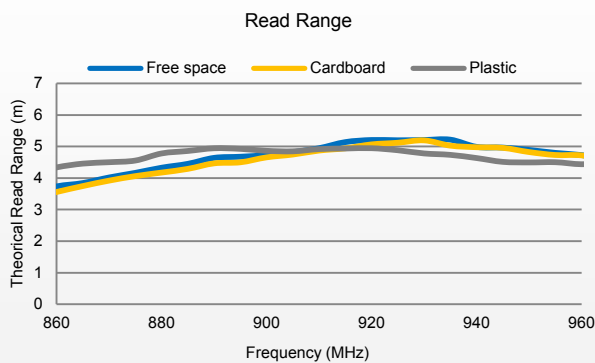

All the graphs are indicative: performance in real life applications may vary.
The data has been determined based on calculations for transmitters with a 2W ERP output power level and an Impinj Monza R6 tag silicon.

Orientation sensitivity



Test set-up



DELIVERY CONDITIONS

	ADHESIVE LABEL
Packaging	Roll (single row)
Core inner diameter	76 mm / 3 in
Roll outer diameter	200 mm / 7.87 in
Unwinding direction	Labels on outside of roll
Standard roll size	4000 pcs
Minimum order quantity	One roll

CERTIFICATIONS & APPROVALS

--	--	--

CONTACT

CONTACT@TAGEOS.COM
WWW.TAGEOS.COM

TAGEOS HEADQUARTERS
515, RUE ALFRED NOBEL
34000 MONTPELLIER
FRANCE

TAGEOS NORTH AMERICA
609 SW 8TH STREET, SUITE 600
BENTONVILLE, AR 72712
USA

STORAGE & HANDLING PRECAUTIONS: Observe standard storage and handling practices to minimize Electro Static Discharge. Tageos reserves the right to change its products and services at any time without notice. As our products are used in circumstances beyond our control, we cannot be held liable for any damages caused through their use.

This is a general purpose product not designed or intended for any specific application. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners.