

# PRODUCT DATASHEET

## Confidex Ironside Slim™



Versatile and durable tag for global asset tracking applications with excellent performance

### ELECTRICAL SPECIFICATION

#### Device type

RAIN RFID / EPCglobal Gen2v2

#### Operational frequency

Global 865-928MHz

#### IC options and memory configurations

Impinj M780™

- EPC 496 bit; User 128 bit; TID 96 bit

Impinj Monza 4E™

- EPC 496 bit; User 128 bit; TID 96 bit

Alien Higgs™ 9

- Standard EPC memory is 96 bits but can be extended to 496 bits by allocating user memory capacity to EPC. User memory 688bit; TID 96bit

#### EPC memory content

Unique number encoded as a default

#### Read range (2W ERP)\*

M780:

- On metal up to 17 m / 55 ft
- Off metal up to 6 m / 20 ft

M4E:

- On metal up to 10 m / 33 ft
- Off metal up to 4 m / 13 ft

H9:


- On metal up to 10 m / 33 ft
- Off metal up to 4 m / 13 ft

#### Applicable surface materials\*

Ideal application on metal, works on any material

\* Read ranges are theoretical values that are calculated for non-reflective environment. Different surface materials may influence performance.

### RADIATION PATTERNS

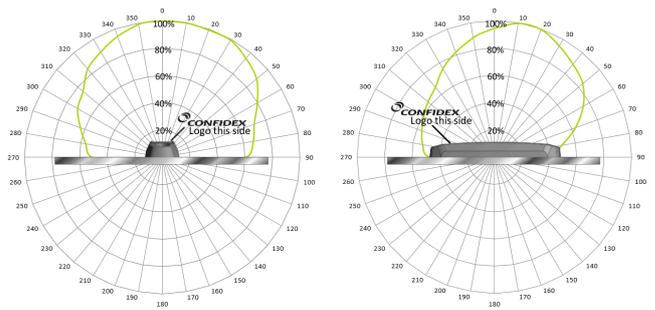

### MECHANICAL SPECIFICATION

#### Tag materials

High quality engineering plastics.

#### Weight

15,5 g

#### Delivery format


Single

#### Amount in box

600 pcs

#### Dimensions

85 x 21 x 10 mm / 3.35 x 0.83 x 0.39 in

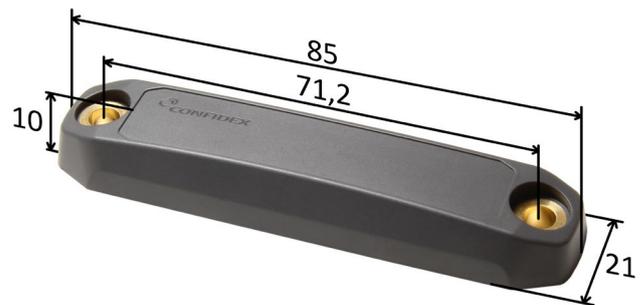

### ENVIRONMENTAL RESISTANCE

#### Operating temperature

-35°C to +85°C / -31°F to +185°F

#### Ambient temperature

-35°C to +85°C / -31°F to +185°F

#### IP classification

IP68

#### Chemical resistance

No physical or performance changes in:

- 168 hour Motor oil exposure
- 24 hour Salt water (salinity 10%) exposure
- 24 hour Sulfuric acid (10%, pH 2) exposure
- 24 hour NaOH (10%, pH 13) exposure

Acetone should be avoided. For achieving increased chemical tolerance, the tag is designed to be attached with industrial adhesives such as polyurethane adhesives or epoxies.

#### Expected lifetime

Years in normal operating conditions

*Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.*

## INSTALLATION INSTRUCTIONS

**Confidex Ironside Slim™ can be attached with several fixing methods:**

1. High performance acrylic adhesive (not included by default)


When background adhesive is ordered the tag is delivered with adhesive attached. When mounting the tag with its adhesive background, clean and dry the surface for obtaining the maximum bond strength. Ideal application temperature is from +21°C to +38°C (+70°F to +100°F), bond strength can be improved with firm application pressure and moderate heating from +38°C to +54°C (+100°F to +130°F). Installation at temperatures below 10°C (50°F) is not recommended.

2. Other adhesive fixings
  - Polyurethane adhesives
  - Epoxies
  - Silicone sealants

Structural adhesives like 3M DP410 provide very high bond strength and resistance against mechanical stress. When tag is attached with sealant adhesive, insert a layer of sealant under the tag and press the tag on the surface. Increase the bond by adding extra sealant from the tag holes. Adhesive type and thickness may have an effect on tag performance. In general more than 2mm layer of adhesive under the tag should be avoided. Please refer to adhesive supplier for exact fixing instructions and test the performance with chosen adhesive.

3. Mechanical fixing

Mechanical fixing is recommended to be used in every application that includes risk for high mechanical stress or low temperature during tag fixing. During fixing make sure there is no air gap left in between the metal surface and tag. Hole dimensions are identical with and without compression limiters. Ironside Slim comes by default with compression limiters included. DIN 7985 M4 screws can be used as a reference.



Ideally the tag is placed on large even metal surface with direct metal contact underneath the whole tag. If placement to edge is needed follow below guidance on positioning and leave metal on the left side for the best performance. Tag polarization is along the longest dimension.



## PERSONALIZATION OPTIONS

### Pre-encoding

- Customer specific encoding of EPC or user memory. Locking permanently or with password.

### Customized data label

- Customer specific layout including logo, text, numbers, barcodes etc.

### Customized laser engraving

- Customer specific layout including logo, text, numbers, barcodes etc.

### Personalization Kit

- Confidex Ironside Slim™ is available also as a Personalization kit where 700 blank PET data labels are delivered on reel per each box of 600 tags. Labels can be printed with standard label printers. Resin ribbon is recommended for best durability.

## ORDER INFORMATION

**Product number:** 3004162

**Product name:** Confidex Ironside Slim™ M780

**Product number:** 3001949

**Product name:** Confidex Ironside Slim™ M4E

**Product number:** 3003896

**Product name:** Confidex Ironside Slim™ H9

For other versions, additional information and technical support contact Confidex Ltd.

### DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.