

# unitech

# HT580 Intelligent Mini-Handy Terminal



## Cutting Edge Design

The Unitech HT580 presents a new cutting-edge design that changes the way you think of portable terminals. The HT580 provides a simple and friendly user interface that gives you full control over its wide range of data capture capabilities.

## One-Hand Operation

The HT580 is designed for one-hand operation. It's a handy tool that enhances your work effectiveness and efficiency. The HT580's keypad is designed with a cell phone style touch and feel that everyone is familiar with. Its large alphanumeric keys are easily identifiable with their bright and bold graphics. The HT580 is a great match for retail markets or other small businesses that need simple, straightforward data entry and bar code scanning.

## Features:

- Compact and lightweight design
- Laser bar code scanner
- User-friendly 18 key keypad
- All-in-one package
- Dimensions: 123mm x 55mm x 25mm
- Weight: 150 grams

### System

CPU	ST-uPSD3354DV
OS	Proprietary Language
Memory	2MB Flash ROM
Keypad	18 keys, including one scan trigger
Display	128 x 64 pixels
Real Time Clock	System date and time

### Power Management

Main Battery	One rechargeable Li-Ion battery pack @ 3.7V, 730mAh
Battery Charging	From fully discharged to fully charged in about 4 hours via cradle or cable
Operation Time	8 hours (Application pending)

### MSL-2000 Laser Engine

Receiving Device	MSL-2000 laser engine
Light Source	Visible Laser Diode 650 nm
Scan rate	100 scans/second
Max. Resolution	0.127mm
Reading distance	Up to 55cm
Printing Contrast Scale	70% Minimum
Skew angle	±50 degrees
Pitch angle	±35 degrees

### Symbologies

China Postal Code, Codabar, Code 11, Code 32  
Code 39, Code 93, Code 128, IATA 2 of 5  
Industrial 2 of 5, Interleaved 2 of 5, Matrix 2 of 5  
MSI, Telepen, UK Plessey Code, UPC/EAN

### Communication


Cable	RS232 and USB 1.1 Y-cable
Cradle	RS232 port for point-to-point communication

### Physical and Environmental

Drop Test	1.2 Meter to concrete floor
Dimensions	123mm x 55mm x 25mm
Weight	150g
Temperature	Operation: 0°C~50°C Storage: -20°C~70°C
Humidity	20%~85% RH, non-condensing
Regulatory	CE, FCC, BSMI, VCCI

### Software Application

Inventory  
Queue Buster  
Patrol Check  
Asset tracking

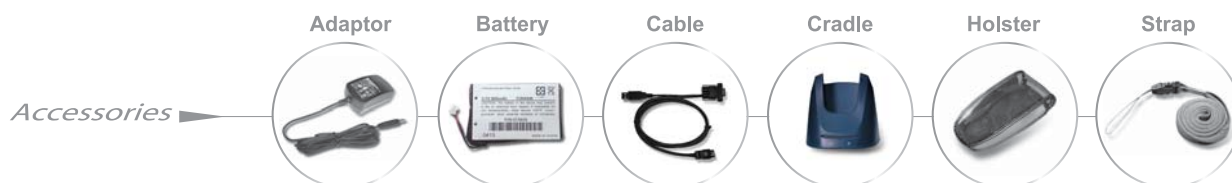

#### Unitech America

Los Angeles, Houston, Guadalajara  
<http://www.ute.com> e-mail: [inquiry@ute.com](mailto:inquiry@ute.com)  
<http://latin.unitech-adc.com> e-mail: [info@latin.ute.com](mailto:info@latin.ute.com)

#### Unitech Asia Pacific & Middle East

Taipei  
<http://www.unitech-utp.com.tw> e-mail: [aidcsales@tw.ute.com](mailto:aidcsales@tw.ute.com)

#### Unitech Japan

Tokyo  
<http://www.unitech-japan.co.jp> e-mail: [sales@unitech-japan.co.jp](mailto:sales@unitech-japan.co.jp)

#### Unitech Europe

Tilburg / Netherlands  
<http://www.unitech-europe.com> e-mail: [sales@unitech-europe.com](mailto:sales@unitech-europe.com)

#### Unitech Greater China

Beijng, Shanghai, Guang Zhou, Xiamen  
<http://www.ute.com.cn> <http://www.ute.cn> [unitech@cn.ute.com](mailto:unitech@cn.ute.com)  
 Taipei <http://adc-utt.unitech.com.tw> [barcode@tw.ute.com](mailto:barcode@tw.ute.com)

#### Head Office

Taipei  
<http://www.unitech-adc.com> e-mail: [marketing@tw.ute.com](mailto:marketing@tw.ute.com)