




- Sleek and thin design with "Built for Touch" Reliability
- 60% Energy Savings using LED Technology
- 3 Year Standard Warranty
- Integrated cable management
- Space-saving design

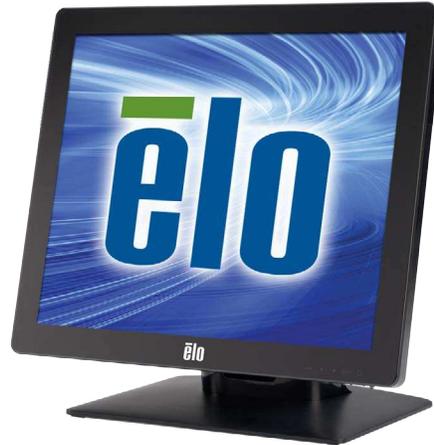

## 1517L 15-inch LED Desktop Touchmonitor

The 1517L touchmonitor is built to withstand the rigors of continuous public use with a rugged "built for touch" design. Its stylish, thin and modern look is coupled with a retail-focused feature set and is an attractive solution for commercial touchmonitor needs. It is well suited for high use public venues where point-of sale, point-of-information, point-of-service, loyalty systems, and shelf-level and countertop interactive digital signage are found.

The 1517L is offered with a choice of touch technology. AccuTouch five-wire resistive is widely used in retail and hospitality environments based on its proven ability to survive splashing liquids, food and grease. IntelliTouch and IntelliTouch Zero-Bezel pure glass surface acoustic

wave technology delivers the ultimate in optical quality for dry retail and hospitality applications. For multi-touch applications, IntelliTouch Pro projected capacitive supports fast, sensitive 10-touch interaction right out of the box.

The optional 3-track magnetic stripe reader (MSR) is programmable to either HID or Keyboard Emulation. It is easily installed by the user, providing an elegant, integrated solution and eliminating the need for external brackets or attachments.

The 1517L touchmonitor is environmentally friendly, lightweight and uses less power with state-of-the-art LED backlights in the display panels.



### Benefits:

- **Edge-to-edge Zero-bezel:** AccuTouch resistive, IntelliTouch Zero-Bezel surface acoustic wave and IntelliTouch Pro projected capacitive multi-touch
- **Traditional Bezel:** AccuTouch resistive and IntelliTouch surface acoustic wave
- **Antiglare or Clear glass**
- **Black or White color choices**
- **Desktop, wall or VESA mounting**
- **Internal and external power options**
- **USB and RS232 serial connections**
- **Customizable with integrated magnetic stripe reader**

### Applications:

- Point-of-Sale
- Point-of-Information

### About Elo

Elo founders pioneered the touchscreen over 40 years ago. Today, Elo Touch Solutions is a leading global supplier of touch-enabled technology, products and industry solutions. The Elo portfolio encompasses the broadest selection of OEM touchscreen components, touchmonitors, and all-in-one touchcomputers for the demanding requirements of diverse markets, including gaming machines, hospitality systems, industrial automation, interactive kiosks, healthcare, office equipment, point of sale terminals, retail displays, and transportation applications. The Elo touch experience has consistently stood for quality, reliability and innovation with over 20 million installations worldwide.

## 1517L 15-inch LCD Desktop Touchmonitor

| Specifications  |  |
|---|--|
| Model   | 1517L  |
| Color   | Black or White   |
| Active Display Area   | 11.97 x 8.98 inches / 304 x 228 mm   |
| Monitor Dimensions (with stand)   | 14.1 x 7.8 x 12.5 inches / 358 x 197 x 319 mm (dimensions vary with stand position and options selected)   |
| Monitor Thickness   | 1.7 inches / 43 mm panel depth   |
| LCD Technology  | Active matrix TFT LCD with LED backlighting  |
| Diagonal Size   | 15.0"  |
| Aspect Ratio  | 4:3  |
| Native (Optimal) Resolution   | 1024 x 768   |
| Other Supported Resolutions   | 640 x 480 @ 60Hz, 75Hz; 720 x 400 @ 70Hz; 800 x 600 @ 56Hz, 60Hz, 75Hz; 1024 x 768 @ 60Hz, 75Hz  |
| Colors  | 16.2 million   |
| Brightness (typical)  | LCD Panel: 250 nits; AccuTouch: 200 nits; IntelliTouch: 225 nits; IntelliTouch ZB: 225 nits; IntelliTouch Pro pcap: 225 nits   |
| Response Time – Total (typical)   | 16 msec  |
| Viewing Angle (typical)   | Horizontal: +/-80° or 160° total; Vertical: +/-70° or 140° total   |
| Contrast Ratio (typical)  | 700:1  |
| Video   | Analog VGA on Female DE-15 connector Input Video Horizontal Sync frequency range: 31.5-60KHz<br>Input Video Vertical Sync (frame rate) frequency range: 56-75Hz  |
| Power   | Monitor input power connector - AC: IEC 60320 C6. Monitor input power signal specifications: 100-240VAC, 50/60Hz<br>Monitor input power connector - DC: Coaxial power jack (2.1mm pin outer diameter, 6.4mm barrel inner diameter);<br>Monitor input power signal specifications: 12VDC ±5%<br>Note: Optional AC-DC power adapter sold for this monitor. Adapter input connector: IEC 60320 C14<br>Adapter input voltage range: 100-240VAC, 50/60Hz;<br>Power Consumption (Typical): ON (monitor): 12W; SLEEP (monitor): 1.0W; OFF (monitor): 0.8W |
| Weight (with stand)   | Unpackaged: 4.3 kg / 9.5 lb; Packaged: 7.3 kg / 16.0 lb.   |
| Shipping Dimensions   | 19.2 x 9.1 x 19.1 inches / 487 x 231 x 485 mm  |
| Mounting Options  | 75 mm VESA mount, capped through-mount holes   |
| On-Screen Display (OSD) Controls (Accessible through switches Along the bottom) | <b>Controls:</b> Menu, Up, Down, Select<br><b>Settings:</b> Brightness, Contrast, Clock, Phase, H- position, V-Position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD Timeout, OSD Language, Recall Defaults<br><b>Languages:</b> English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese<br><b>Lockouts:</b> OSD, Power  |
| Temperature   | Operating: 0 °C to 40 °C /32 °F to 104 °F; Storage: -20 °C to 60 °C /-4 °F to 140 °F   |
| Humidity (non-condensing)   | Operating: 20%-80%; Storage: 10%-90%   |
| Regulatory approvals and declarations   | Argentina S-mark, Australia C-Tick, Canada cUL, IC, China CCC, Europe CE, Japan VCCI, Korea KCC, e-Standby, Mexico CoC, Taiwan BSMI Mark, United States UL, FCC, International CB, RoHS, China RoHS, WEEE, IMERC   |
| Touch Interface   | Serial (RS232) and USB   |
| Warranty  | 3 years standard   |
| MTBF  | 50,000 hours demonstrated  |

## Ordering Information

| Model   | Part Number           | Technology      | Interface  | Bezel     | Surface Treatment | Color     | Availability |
|---------|-----------------------|-----------------|------------|-----------|-------------------|-----------|--------------|
| 1517L   | E523163               | AccuTouch       | Serial/USB | Yes       | Antiglare         | Black     | Worldwide    |
|         | E532051               | AccuTouch       | Serial/USB | Yes       | Antiglare         | White     | Worldwide    |
|         | E144246               | AccuTouch       | Serial/USB | No        | Antiglare         | Black     | Worldwide    |
|         | E590483               | AccuTouch       | Serial/USB | No        | Antiglare         | White     | Worldwide    |
|         | E344758               | IntelliTouch    | Serial/USB | Yes       | Antiglare         | Black     | Worldwide    |
|         | E579160               | IntelliTouch    | Serial/USB | Yes       | Antiglare         | White     | Worldwide    |
|         | E829550               | IntelliTouch ZB | Serial/USB | No        | Clear             | Black     | Worldwide    |
|         | E342516               | IntelliTouch ZB | Serial/USB | No        | Clear             | White     | Worldwide    |
|         | E273226               | IntelliTouch ZB | Serial/USB | No        | Antiglare         | Black     | Worldwide    |
|         | E236309               | IntelliTouch ZB | Serial/USB | No        | Antiglare         | White     | Worldwide    |
| E648912 | IntelliTouch Pro PCAP | USB             | No         | Antiglare | Black             | Worldwide |              |

## Optional Peripherals

| Peripheral             | Interface | Color | Part Number |
|------------------------|-----------|-------|-------------|
| Magnetic Stripe Reader | USB       | Black | E500356     |
| Magnetic Stripe Reader | USB       | White | E233227     |

To find out more about our extensive range of Elo touch solutions, go to [www.elotouch.com](http://www.elotouch.com), or call the office nearest you.

### North America

Elo Touch Solutions  
1033 McCarthy Boulevard  
Milpitas, CA 95035

### 800-ELO-TOUCH

Tel +1 408 597 8000  
Fax +1 408 597 8050  
customerservice@elotouch.com

### Europe

Tel +32 (0)16 70 45 00  
Fax +32 (0)16 70 45 49  
elosales@elotouch.com

### Asia-Pacific

Tel +86 (21) 3329 1385  
Fax +86 (21) 3329 1400  
www.elotouch.com.cn

### Latin America

Tel 786-923-0251  
Fax 305-931-0124  
www.elotouch.com

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo (logo) and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc. ©2015 Elo Touch Solutions, Inc. All rights reserved. 15111AES00011





- Sleek and thin design with "Built for Touch" Reliability
- 40% Energy Savings using LED Technology
- 3 Year Standard Warranty
- Integrated cable management
- Space-saving design



## 1717L 17-inch LED Desktop Touchmonitor

The 1717L touchmonitor is built to withstand the rigors of continuous public use with a rugged "built for touch" design. Its stylish, thin and modern look is coupled with a retail-focused feature set and is an attractive solution for commercial touchmonitor needs. It is well suited for high use public venues where point-of-sale, point-of-information, point-of-service, loyalty systems, and shelf-level and countertop interactive digital signage are found.

The 1717L is offered with a choice of touch technology. AccuTouch five-wire resistive is widely used in retail and hospitality environments based on its proven ability to survive splashing liquids, food and grease. IntelliTouch and IntelliTouch Zero-Bezel pure glass surface acoustic

wave technology delivers the ultimate in optical quality for dry retail and hospitality applications. For multi-touch applications, IntelliTouch Pro projected capacitive supports fast, sensitive 10-touch interaction right out of the box.

The optional 3-track magnetic stripe reader (MSR) is programmable to either HID or Keyboard Emulation. It is easily installed by the user, providing an elegant, integrated solution and eliminating the need for external brackets or attachments.

The 1717L touchmonitor is environmentally friendly, lightweight and uses less power with state-of-the-art LED backlights in the display panels.



#### Key features:

- **Edge-to-edge Zero-bezel:**  
AccuTouch resistive, IntelliTouch Zero-Bezel surface acoustic wave and IntelliTouch Pro projected capacitive multi-touch
- **Traditional Bezel:**  
AccuTouch resistive and IntelliTouch surface acoustic wave
- **Antiglare or Clear glass**
- **Black or White color choices**
- **Desktop, wall or VESA mounting**
- **Internal and external power options**
- **USB and RS232 serial connections**
- **Customizable with integrated magnetic stripe reader**

#### Key Applications:

- Point-of-Sale
- Point-of-Information

#### About Elo

Elo founders pioneered the touchscreen over 40 years ago. Today, Elo Touch Solutions is a leading global supplier of touch-enabled technology, products and industry solutions. The Elo portfolio encompasses the broadest selection of OEM touchscreen components, touch monitors, and all-in-one touch computers for the demanding requirements of diverse markets, including banking, gaming machines, hospitality systems, industrial automation, interactive kiosks, healthcare, office equipment, point of sale terminals, retail displays, and transportation applications. The Elo touch experience has consistently stood for quality, reliability and innovation with more than 20 million installations worldwide.

## 1717L 17-inch Desktop Touchmonitor

| Specifications  |  |
|---|--|
| Model   | 1717L  |
| Color   | Black or white   |
| Active Display Area   | 13.3 x 10.6 inches/338 x 270 mm  |
| Monitor Dimensions (with stand)   | 15.4 x 8.5 x 14.2 inches / 392 x 215 x 361 mm (dimensions vary with stand position and options selected)   |
| Monitor Thickness   | 1.7 inches / 43 mm panel depth   |
| LCD Technology  | Active matrix TFT LCD with LED backlighting  |
| Diagonal Size   | 17.0"  |
| Aspect Ratio  | 5:4  |
| Native (Optimal) Resolution   | 1280 x 1024  |
| Other Supported Resolutions   | 640 x 480 @ 60Hz, 75Hz; 720 x 400 @ 70Hz; 800 x 600 @ 56Hz, 60Hz, 75Hz; 1024 x 768, @60Hz, 75Hz; 1280 x 1024 @ 60Hz, 75Hz  |
| Colors  | 16.7 million   |
| Brightness (typical)  | LCD Panel: 250 nits; AccuTouch: 200 nits; IntelliTouch: 225 nits; IntelliTouch ZB: 225 nits; IntelliTouch Pro pcap: 225 nits   |
| Response Time – Total (typical)   | 7.8msec  |
| Viewing Angle (typical)   | Horizontal: +/-85° or 170° total; Vertical: +/-80° or 160° total   |
| Contrast Ratio (typical)  | 1000:1   |
| Video   | Analog VGA on Female DE-15 connector; Input Video Horizontal Sync frequency range: 31.5-80KHz<br>Input Video Vertical Sync (frame rate) frequency range: 56-75Hz   |
| Power   | Monitor input power connector - AC: IEC 60320 C6. Monitor input power signal specifications: 100-240VAC, 50/60Hz<br>Monitor input power connector - DC: Coaxial power jack (2.1mm pin outer diameter, 6.4mm barrel inner diameter);<br>Monitor input power signal specifications: 12VDC ±5%<br>Note: Optional AC-DC power adapter sold for this monitor. Adapter input connector: IEC 60320 C14<br>Adapter input voltage range: 100-240VAC, 50/60Hz;<br>Power Consumption (Typical): ON (monitor): 20W; SLEEP (monitor): 1.1W; OFF (monitor): 0.8W |
| Weight (with stand)   | Unpackaged: 5.4 kg / 11.9 lb.; Packaged: 8.3 kg/18.3 lb.   |
| Shipping Dimensions   | 20.1 x 9.2 x 20 inches / 511 x 233 x 510 mm  |
| Mounting Options  | 75 mm VESA mount, capped through-mount holes   |
| On-Screen Display (OSD) Controls (Accessible through switches Along the bottom) | <b>Controls:</b> Menu, Up, Down, Select<br><b>Settings:</b> Brightness, Contrast, Clock, Phase, H- position, V-Position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD Timeout, OSD Language, Recall Defaults<br><b>Languages:</b> English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese<br><b>Lockouts:</b> OSD, Power  |
| Temperature   | Operating: 0 °C to 40 °C /32 °F to 104 °F; Storage: -20 °C to 60 °C /-4 °F to 140 °F   |
| Humidity (non-condensing)   | Operating: 20%-80%; Storage: 10%-90%   |
| Regulatory approvals and declarations   | Argentina S-mark, Australia C-Tick, Canada cUL, IC, China CCC, Europe CE, Japan VCCI, Korea KCC, e-Standby, Mexico CoC, Taiwan BSMI Mark, United States UL, FCC, International CB, RoHS, China RoHS, WEEE, IMERC   |
| Touch Interface   | Serial (RS232) and USB   |
| Warranty  | 3 years standard   |
| MTBF  | 50,000 hours demonstrated  |

## Ordering Information

| Model | Part Number | Technology            | Interface  | Bezel | Surface Treatment | Color | Availability |
|-------|-------------|-----------------------|------------|-------|-------------------|-------|--------------|
| 1717L | E877820     | AccuTouch             | Serial/USB | Yes   | Antiglare         | Black | Worldwide    |
|       | E371267     | AccuTouch             | Serial/USB | Yes   | Antiglare         | White | Worldwide    |
|       | E649473     | AccuTouch             | Serial/USB | No    | Antiglare         | Black | Worldwide    |
|       | E679434     | AccuTouch             | Serial/USB | No    | Antiglare         | White | Worldwide    |
|       | E077464     | IntelliTouch          | Serial/USB | Yes   | Antiglare         | Black | Worldwide    |
|       | E214112     | IntelliTouch          | Serial/USB | Yes   | Antiglare         | White | Worldwide    |
|       | E179069     | IntelliTouch ZB       | Serial/USB | No    | Clear             | Black | Worldwide    |
|       | E227652     | IntelliTouch ZB       | Serial/USB | No    | Clear             | White | Worldwide    |
|       | E017030     | IntelliTouch ZB       | Serial/USB | No    | Antiglare         | Black | Worldwide    |
|       | E415033     | IntelliTouch ZB       | Serial/USB | No    | Antiglare         | White | Worldwide    |
|       | E824217     | IntelliTouch Pro PCAP | USB        | No    | Antiglare         | Black | Worldwide    |

## Optional Peripherals

| Peripheral             | Interface | Color | Part Number |
|------------------------|-----------|-------|-------------|
| Magnetic stripe reader | USB       | Black | E500356     |
| Magnetic stripe reader | USB       | White | E233227     |

To find out more about our extensive range of Elo touch solutions, go to [www.elotouch.com](http://www.elotouch.com), or call the office nearest you.

### North America

Elo Touch Solutions  
1033 McCarthy Boulevard  
Milpitas, CA 95035

800-ELO-TOUCH

Tel +1 408 597 8000  
Fax +1 408 597 8001  
customerservice@elotouch.com

### Europe

Tel +32 (0)16 70 45 00  
Fax +32 (0)16 70 45 49  
elosales@elotouch.com

### Asia-Pacific

Tel +86 (21) 3329 1385  
Fax +86 (21) 3329 1400  
www.elotouch.com.cn

### Latin America

Tel +1 786-923-0251  
Fax +1 305-931-0124  
www.elotouch.com

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo (logo) and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc. © 2015 Elo Touch Solutions, Inc. All rights reserved. 15121AEB00013

