




B360 Pro FULLY RUGGED NOTEBOOK

- Extreme ruggedness with MIL-STD 810H, 6 feet operating drop rating, IP66 certified, and optional salt fog resistant
- 10th Generation Intel® Core™ Processor
- 13.3" FHD LumiBond® 2.0 Display with Getac Sunlight Readable Technology (1,400 nits) and Capacitive Touchscreen
- Optional NVIDIA® GeForce® GTX1050 4GB Discrete Graphic Controller
- Enhanced Enterprise Security with optional dual user replaceable storage, Windows Hello Face-authentication Camera, integrated 1D / 2D Imager Barcode Reader and Multi-factor Authentication Options
- LifeSupport™ Battery SwappableTechnology



Office Dock

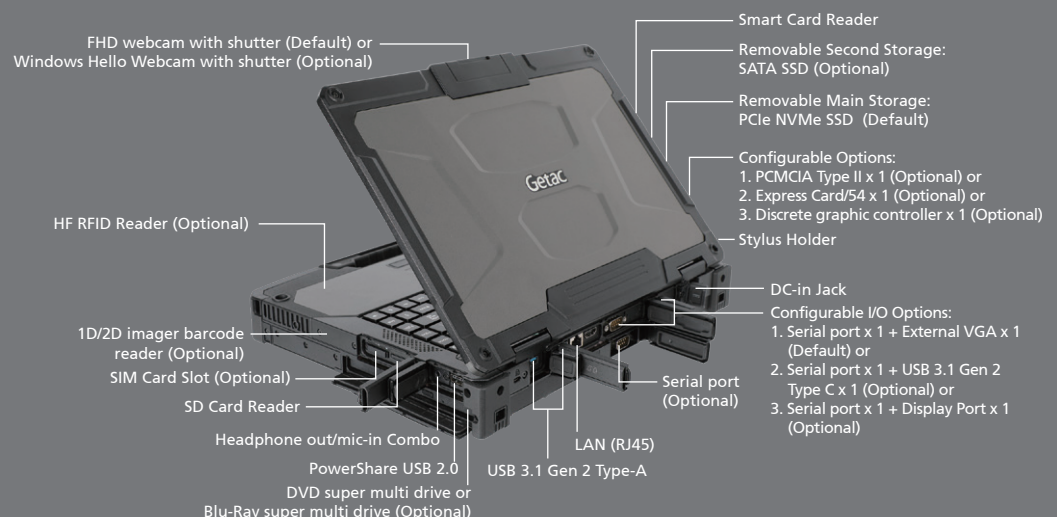

Specifications

Operating System

Windows 10 Pro

Mobile Computing Platform

Platform Options:

Intel® Core™ i7 Technology
Intel® Core™ i7-10510U Processor 1.8 GHz
Max. 4.9 GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7 Technology
Intel® Core™ i7-10710U Processor 1.1 GHz
Max. 4.7 GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i5 Technology
Intel® Core™ i5-10210U Processor 1.6 GHz
Max. 4.2 GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics
Optional NVIDIA® GeForce® GTX1050 4GB
discrete graphic controller^{iviii}

Display

13.3" IPS TFT LCD FHD (1920 x 1080)
1400 nits LumiBond® display with Getac sunlight
readable technology
Capacitive multi-touch screen

Storage & Memory

Optional 8GB / 16GB / 32GB / 64GB DDR4
Optional main storage: 256GB / 512GB / 1TB PCIe NVMe SSD
Optional 2nd storageⁱ: 256GB / 512GB / 1TB SATA SSD

Keyboard

LED backlit membrane keyboard
Optional LED backlit rubber keyboard

Pointing Device

Touchscreen
- Capacitive multi-touch screen
Touchpad
- Glide touchpad with multi-touch

Expansion Slot

Smart Card reader x 1
SD Card reader x 1
Optional PCMCIA Type II or Express Card/54 or
Discrete graphic controller^{iviii}
Optional 1D/2D imager barcode reader

Multimedia Bay

Optional DVD super multi drive or Blu-Ray super multi driveⁱⁱ

I/O Interface

FHD webcam x 1 or Optional Windows Hello
face-authentication camera (front-facing) x 1
Headphone out/mic-in Combo x 1
DC in Jack x 1
USB 3.1 Gen 2 Type-A x 2
PowerShare USB 2.0 x 1
LAN (RJ45) x 1
HDMI x 1
Docking connector x 1
SD Card Reader x 1
Optional SIM card slot x 1
Optional RF antenna pass-through for GPS,
WLAN and WWAN

Configurable I/O Options^{ix}:
Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1, or
Serial port (9-pin; D-sub) x 1 + USB 3.1 Gen 2 Type C x 1, or
Serial port (9-pin; D-sub) x 1 + Display Port x 1, or
Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1, or
Serial port (9-pin; D-sub) x 2 + USB 3.1 Gen 2 Type C x 1, or
Serial port (9-pin; D-sub) x 2 + Display Port x 1

Communication Interface

10 / 100 / 1000 base-T Ethernet
Intel® Wi-Fi 6 AX200, 802.11ax
Bluetooth (v5.1)^x
Optional dedicated GPS^{xi}
Optional 4G LTE mobile broadband with
integrated GPS^{xi}

Security Feature

TPM 2.0
Smart Card reader x 1
Kensington lock
Optional HF RFID Reader^{vi}

Power

AC adapter (90W, 100-240VAC, 50 / 60Hz)
AC adapter (120W, 100-240VAC, 50 / 60 Hz)ⁱⁱⁱ
High capacity battery (10.8V, typical 6900mAh;
min. 6600mAh) x 2
LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 53.5 mm (13.46" x 11.06" x 2.11"),
3.08Kg (6.79 lbs)^x

Rugged Feature

MIL-STD-810H certified and IP66 certified
MIL-STD-461G certified^x
Optional ANSI/UL 121201, CSA C22.2 NO. 213
6 feet drop resistantⁱⁱ
Optional salt fog certified
e-Mark certified for vehicle usage

Environmental Specification

Temperature^{xi} :
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH , non-condensing

Software

Getac Utility
Getac Geolocation
Getac Barcode Manager
Optional Absolute DDS® Persistence

Accessories

Backpack
Multi-bay charger (Dual Bay)
Multi-Bay charger (Eight-Bay)
Vehicle adapter (120W, 11-32VDC)
MIL-STD-461 certified AC adapter (90W, 100-240VAC)
Capacitive stylus (Hard-tip)
Protection film
High capacity battery (10.8V, typical 6900mAh;
min. 6600mAh)
AC adapter (90W, 100-240VAC)
AC adapterⁱⁱⁱ (120W, 100-240VAC)
Spare SSD kit
Vehicle dock
Office dock

Bumper-to-Bumper warranty

Accidents can take your equipment out of service
when you least expect it, especially in a rugged
environment, which can cause costly equipment
downtime.

That is why Getac has introduced accidental
damage as standard under our new
Bumper-to-Bumper warranty, to help minimize
your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee.

That means you can depend on us to have your
unit back in service within days.

Standard

3 years Bumper-to-Bumper

- i Discrete graphic card, PCMCIA slot, and
express card slot are mutually exclusive.
- ii Second storage is optional and will be fitted
with a removable cover when not chosen at
point of purchase.
- iii DVD super multi drive and Blu-Ray super multi
drive are mutually exclusive.
- iv External VGA, USB 3.1 Gen 2 Type C and
Display Port are mutually exclusive.
- v Bluetooth performance and connectable
distance may be subject to interference with
the environments and performance on client
devices, users may be able to reduce effects of
interference by minimizing the number of
active Bluetooth wireless devices that is
operating in the area.
- vi Dedicated GPS is mutually exclusive with 4G
LTE mobile broadband.
- vii HF(13.56MHz) Combo HF RFID/NFC reader
(iClass, HID Prox compliant, ISO 15693, 14443
A/B, Mifare, FeliCa™).
- viii 120W AC adapter is used for office dock and for
device configured with Discrete Graphic Card.
- ix Weight and dimensions vary from
configurations and optional accessories.
- x MIL-STD-461G 90W AC adapter sold separately.
- xi Tested by a national independent third party
test lab following MIL-STD-810H.

B360 Pro

Fully Rugged Notebook



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	--	1
Audio Output	--	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI	1	1
RF Antenna Connector	(GPS, WWAN, WLAN) (optional)	--
Kensington Lock	1	1

Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,
Nangang Dist., Taipei City, 11568, Taiwan, R.O.C.
Tel : +886 2 2785 7888
globalmarketing@getac.com | www.getac.com



Copyright © 2020 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference only,
available specification shall be subjected to quotation by request. V01M05Y20WWW



B360 FULLY RUGGED NOTEBOOK

- Extreme ruggedness with MIL-STD 810H, 6 feet operating drop rating, IP66 certified, and optional salt fog resistant
- 10th Generation Intel® Core™ Processor
- 13.3" FHD LumiBond® 2.0 Display with Getac Sunlight Readable Technology (1,400 nits) and Capacitive Touchscreen
- Enhanced Enterprise Security with optional dual user replaceable storage, Windows Hello Face-authentication Camera, integrated 1D / 2D Imager Barcode Reader and Multi-factor Authentication Options
- LifeSupport™ Battery Swappable Technology



Office Dock

FHD webcam with shutter (Default) or
Windows Hello Webcam with shutter (Optional)

HF RFID Reader (Optional)

1D/2D imager barcode
reader (Optional)

SIM Card Slot (Optional)

SD Card Reader

Headphone out/mic-in Combo

PowerShare USB 2.0

LAN (RJ45)

USB 3.1 Gen 2 Type-A

Smart Card Reader

Removable Second Storage:
SATA SSD (Optional)

Removable Main Storage:
PCIe NVMe SSD (Default)

Stylus Holder

DC-in Jack

Configurable I/O Options:
1. Serial port x 1 + External VGA x 1
(Default) or
2. Serial port x 1 + USB 3.1 Gen 2
Type C x 1 (Optional) or
3. Serial port x 1 + Display Port x 1
(Optional)

Specifications

Operating System

Windows 10 Pro

Mobile Computing Platform

Platform Options:

Intel® Core™ i7 Technology

Intel® Core™ i7-10510U Processor 1.8 GHz

Max. 4.9 GHz with Intel® Turbo Boost Technology

- 8MB Intel® Smart Cache

Intel® Core™ i7 Technology

Intel® Core™ i7-10710U Processor 1.1 GHz

Max. 4.2 GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Intel® Core™ i5 Technology

Intel® Core™ i5-10210U Processor 1.6 GHz

Max. 4.2 GHz with Intel® Turbo Boost Technology

- 6MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics

Display

13.3" IPS TFT LCD FHD (1920 x 1080)

1400 nits LumiBond® display with Getac sunlight readable technology

Capacitive multi-touch screen

Storage & Memory

Optional 8GB / 16GB / 32GB / 64GB DDR4

Optional main storage: 256GB / 512GB / 1TB PCIe NVMe SSD

Optional 2nd storage: 256GB / 512GB / 1TB SATA SSD

Keyboard

LED backlit membrane keyboard

Optional LED backlit rubber keyboard

Pointing Device

Touchscreen

- Capacitive multi-touch screen

Touchpad

- Glide touchpad with multi-touch

Expansion Slot

Smart Card reader x 1

SD Card reader x 1

Optional 1D / 2D imager barcode reader

I/O Interface

FHD webcam x 1 or Optional Windows Hello

face-authentication camera (front-facing) x 1

Headphone out/mic-in Combo x 1

DC in Jack x 1

USB 3.1 Gen 2 Type-A x 2

PowerShare USB 2.0 x 1

LAN (RJ45) x 1

HDMI x 1

Docking connector x 1

SD Card Reader x 1

Optional SIM card slot x 1

Optional RF antenna pass-through for GPS,

WLAN and WWAN

Configurable I/O Optionsⁱⁱ:

Serial port (9-pin; D-sub) x 1 + External VGA

(15-pin; D-sub) x 1, or

Serial port (9-pin; D-sub) x 1 + USB 3.1 Gen 2

Type C x 1, or

Serial port (9-pin; D-sub) x 1 + Display Port x 1

Communication Interface

10 / 100 / 1000 base-T Ethernet

Intel® Wi-Fi 6 AX200, 802.11ax

Bluetooth (v5.1)ⁱⁱⁱ

Optional dedicated GPS^{iv}

Optional 4G LTE mobile broadband with

integrated GPS^v

Security Feature

TPM 2.0

Smart Card reader x 1

Kensington lock

Optional HF RFID Reader^{vi}

Power

AC adapter (90W, 100-240VAC, 50 / 60Hz)

Li-Ion battery (11.1V, typical 2100mAh; min.

2040mAh) x 2

LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 34.9 mm (13.46" x 11.06" x 1.37"),

2.32 kg (5.11 lbs)ⁱⁱ

Rugged Feature

MIL-STD-810H certified and IP66 certified

MIL-STD-461G certified^{vii}

Optional ANSI/UL 121201, CSA C22.2 NO. 213

6 feet drop resistant^{viii}

Optional salt fog certified

e-Mark certified for vehicle usage

Environmental Specification

Temperature^{viii} :

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Software

Getac Utility

Getac Geolocation

Getac Barcode Manager

Optional Absolute DDS® Persistence

Accessories

Backpack

Multi-bay charger (Dual Bay)

Multi-Bay charger (Eight-Bay)

Vehicle adapter (120W, 11-32VDC)

MIL-STD-461 certified AC adapter (90W, 100-240VAC)

Capacitive stylus (Hard-tip)

Protection film

Standard battery (11.1V, typical 2100mAh; min.

2040mAh)

AC adapter (90W, 100-240VAC)

AC adapter for office dock (120W, 100-240VAC)

Spare SSD kit

Vehicle dock

Office dock

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our new Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee.

That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- i Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- ii External VGA, USB 3.1 Gen 2 Type C and Display Port are mutually exclusive.
- iii Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- iv Dedicated GPS is mutually exclusive with 4G LTE mobile broadband.
- v HF(13.56MHz) Combo HF RFID/NFC reader (iClass, HID Prox compliant, ISO 15693, 14443 A/B, Mifare, FeliCa™).
- vi Weight and dimensions vary from configurations and optional accessories.
- vii MIL-STD-461G 90W AC adapter sold separately.
- viii Tested by a national independent third party test lab following MIL-STD-810H.

B360

Fully Rugged Notebook



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	--	1
Audio Output	--	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI	1	1
RF Antenna Connector	(GPS, WWAN, WLAN) (optional)	--
Kensington Lock	1	1

Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,

Nangang Dist., Taipei City, 11568, Taiwan, R.O.C.

Tel : +886 2 2785 7888

globalmarketing@getac.com | www.getac.com



Copyright © 2020 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference only,
available specification shall be subjected to quotation by request. V01M05Y20WWW