

# POS Peripherals

## SCD122 USB Powered Display

The new, fast, easy-to-read 2 lines x 20 character customer display from Star with ESC/POS™, and OPOS™ support.

- Supplied with a choice of support including stand alone base and telescopic pole
- High speed data transfer using 2.0 USB interface
- Clear, fast easy-to-read with wide viewing angle
- ESC/POS™ emulation (dip switch selectable)
- Cyrillic character support (multiple code pages)



## SCD400 Customer Display

For use with POS and ECR Systems. The Star SCD400 Display uses the same serial interface as the Star POS printer.

- Reliable and versatile 2 lines x 20 character customer display
- Large, clear, easy-to-read characters
- Wide viewing angle
- Single interface for display and printer
- New charcoal grey & Star white versions available



## SCD122 & SCD400 Customer Display Specifications

	SCD122	SCD400
Display Method	Vacuum fluorescent display	
Display Colour	Blue-Green	
No. of Characters	40 (20 columns x 2 lines)	
Character Font	5 x 7 dot matrix	
Character size (H x W)	5.00 x 3.5mm	9 x 5.25mm
Brightness	min. 350 cd/m <sup>2</sup>	
Tilt angle	max 30° / Rotation 300°	max 30° / Rotation 360°
Power Consumption	max. 500mA @ 5V (2.5W) USB powered	max. 400mA @ 12V (4.8W)
Interface	USB 2.0	Serial RS232 C

	SCD122	SCD400
Emulation:		
ESC/POS™ compatible	ESC/POS™ DMD110 via dip switch	not available
Star Mode	Standard	Standard
Operating Conditions:		
Temperature	5 ~ 45°C	5 ~ 45°C
Humidity	10% ~ 90% RH	10% ~ 85% RH
Storage Conditions:		
Temperature	-20 ~ 60°C	-20 ~ 60°C
Humidity	10% ~ 90% RH	10% ~ 90% RH
Dimensions (w x d x h):		
Display Unit	175 x 53 x 72mm	231 x 45 x 110mm
Stand alone height	142 / 272 / 387 / 517mm	not available
Stand alone base	175 x 110 x 61mm	not available
Telescopic Pole height	124 / 254 / 369 / 499mm	380 ~ 550mm
Pole Base	40mm height 80mm diameter	12mm height 80mm diameter
Weight	1.4Kg packaged with base & supports	approx 850g
Colour	Both available in Charcoal grey and Star white	




*The SCD122 comes with all the support choices in the box, which includes a stand alone base and telescopic pole. There's also a CD-ROM containing the drivers, manuals and utilities.*

## CB-2002 and CB-92 II

Versatile Cash Drawers for PC Point of Sale Systems

- Sturdy reliable PC POS cash drawers
  - Driven from the peripheral drive circuit of a Star or Epson POS printer
  - 3 position key lock
  - Both versions include a compulsion switch
- Star's Series of cash drawers have been specifically designed to link with Star's and other industry standard POS printers. They range from the basic entry level model to the larger version aimed at markets with more note sizes.

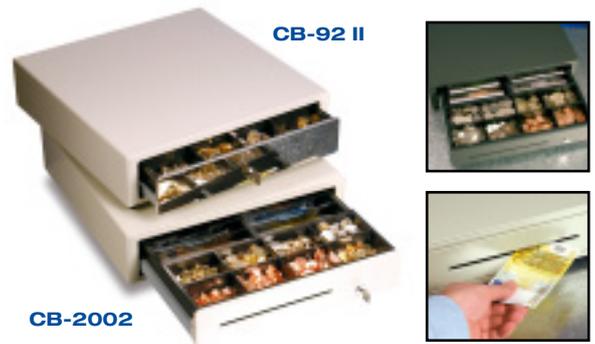

### CB-2002 Specifications

Connection to Peripheral Drive Circuit of Star Printer	Via 6-pin Modular plug connected to cash drawer by shielded cable with separated ground wire
Cash Tray Combination	8 Note and 8 Coin plus external Voucher / Cheque slot
Dimensions	410 (W) x 415 (D) x 114 (H) mm
Weight	7Kg
Input Voltage & Current	DC 24 Volt, 1 amp
Pulse Time	100m.s (max), 30m.s (min)
Colour	Star white or new "Darker" charcoal grey versions
Drawer Release	3 position key lock with Drawer Release
Options available	Under desk "Z" brackets, Lockable cover, Note Holder Bracket and Note Divider

### CB-92 II Specifications

Connection to Peripheral Drive Circuit of Star Printer	Via 6-pin Modular plug connected to cash drawer by shielded cable with separated ground wire
Cash Tray Combination	5 Note and 8 Coin
Dimensions	460 (W) x 460 (D) x 113 (H) mm
Weight	10.3Kg
Input Voltage & Current	DC 24 Volt, 1 amp
Pulse Time	100m.s (max), 30m.s (min)
Colour	Star white or charcoal grey with chrome drawer front
Drawer Release	3 position key lock with Drawer Release
Options available	Note Holder Bracket, Note Divider